



GOB VERSION



DEFINITION



MUTE



CONTRAST



FUNCTIONAL



LOW POWER

LEDinUSA.com



LED SHELF™

THE SMARTER SOLUTION

FOR ALL RETAIL OUTLETS
WITH PRODUCT SHELVES

SPECIFICATION SHEET

- Light robust design and a variety of easy installation methods with specialized front access for easier maintenance
- Protected inner board and cabling for a cleaner, stable and reliable sealed unit with surge protection
- Uses GOB technology for a firmer screen surface with anti-collision, anti-oxidation, anti-UV, waterproof and dustproof properties
- Supports USB, Wi-Fi, 4G and ethernet connectivity
- Comfortable 160 degree viewing angle
- A high refresh rate and contrast ratio with 99% brightness uniformity for amiable viewability






LEDinUSA.com



Hardware Parameters	P1.25	P1.5	P1.87
Pixel pitch(H×W) mm	1.25mm	1.5mm	1.875mm
Pixel configuration	GOB	GOB	GOB
LEDS	1010	1010	1515
Module size(W×H) mm	240*60	240*60	240*60
Resolution	192*48	160*40	128*32
Cabinet size(W×H) mm	720*60*30	720*60*30	720*60*30
Cabinet resolution	576*48	480*40	384*32
Pixel density(pixel/m ²)	640,000	409,600	284,444
Scan	48	40	32
Refresh (hz)	3840	3840	3840
Viewing Angle	140°/110°	140°/110°	140°/110°
Max.Power consumption	680W/m ²	680W/m ²	540W/m ²
Avg.Power consumption	225W/m ²	225W/m ²	180W/m ²
Brightness (cd/m ²)	600	600	600
IP Protection	IP20	IP20	IP20
Frequency	>60HZ	>60HZ	>60HZ
Serviceability	Front service	Front service	Front service
Color temperature	5000-15000K	5000-15000K	5000-15000K
Contrast ratio	5000:1	5000:1	5000:1
Operation temperature	-20°C to +60°C	-20°C to +60°C	-20°C to +60°C
Lifetime	>100,000hours	>100,000hours	>100,000hours
Gray scale	14-16 bit	14-16 bit	14-16 bit
Promotion Content	User Provided	Creation	Upgrade & Maintain
Images & Graphic Design	✓	✓	✓
Video	✓	✓	✓

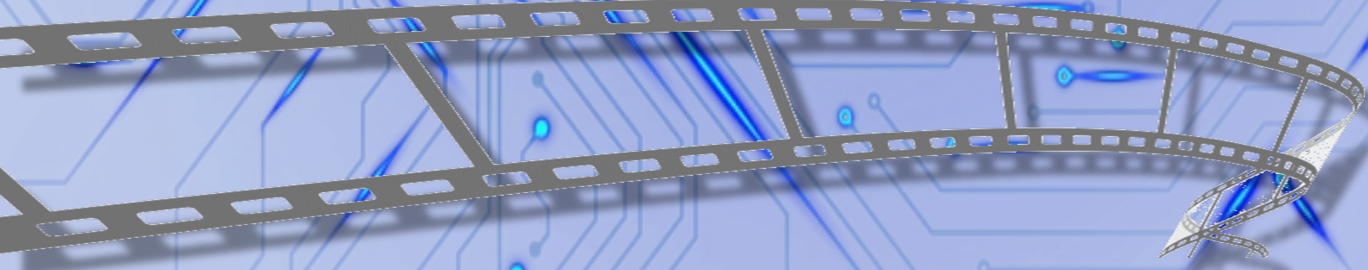

CONFIGURATION SCHEMATIC



COMPUTER




LAPTOP




MOBILE



WIFI



LAN



USB Disk



4G



Multimedia Controller



Multimedia Controller




Gigabit LAN Switch

LEDinUSA.com


info@eventstretch.com

(407) 670 5460

CAT5E

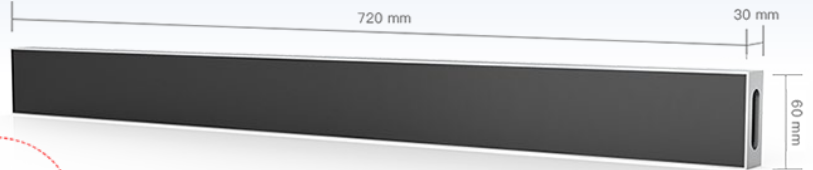

Cable In and Out

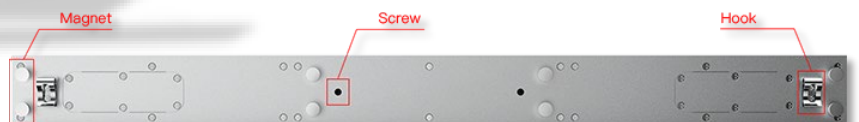

Magnet

Screw

Hook